




HXD8015 Series


Size:	80×80×15mm (3.15" × 3.15" × 0.59")
Frame:	Plastic PBT (UL:94V-0)
Impeller:	Plastic PBT (UL:94V-0)
Life expectancy:	Sleeve Bearing 30000(Hrs) at 25°C Ball Bearing 50000(Hrs) at 25°C
Operating temperature:	Ball bearing: -30~75°C Sleeve bearing: -10~70°C
Dielectric strength:	5 mA max at 500VAC 60Hz 1minute
Safety:	UL/ CUL /CE /TUV
Net weight:	APPROX.59g



Outline Dimensions (Units: mm)

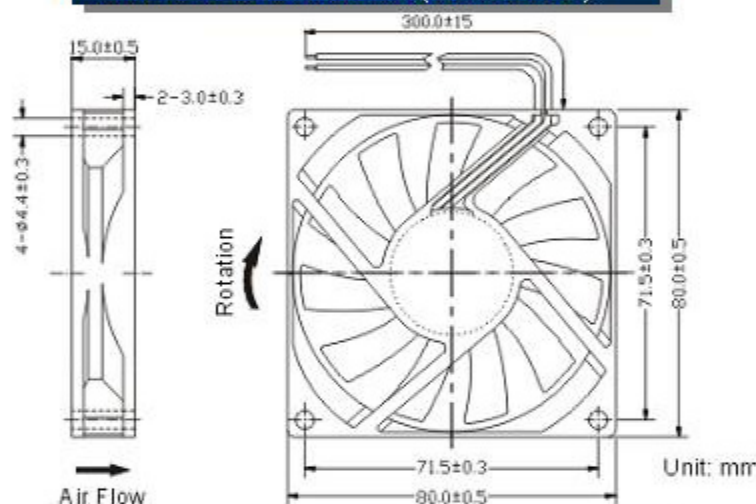

Performance Curve

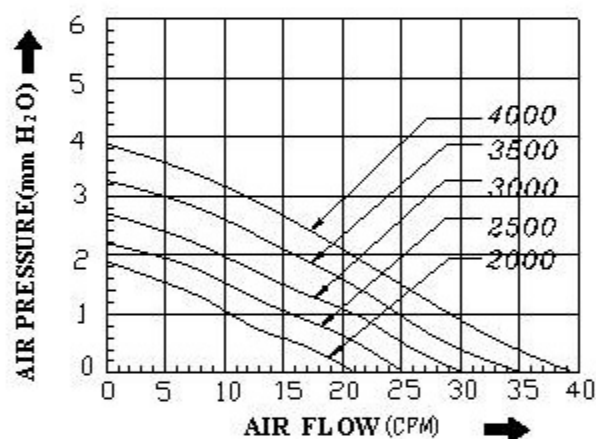

Specifications

Voltage Available

5	12	24	48
---	----	----	----

B	S	BS	Available
---	---	----	-----------

Function Available

FG	RD	AS	PWM	OVP
----	----	----	-----	-----

Voltage Available

	(V)	(V)	(A)	(W)	(rpm)	(m ³ /min)	CFM	mmH ₂ O	IN H ₂ O	dB-A
HXD801512L	12	6~13.2	0.08	0.96	2000	0.600	21.20	1.88	0.074	22.70
HXD801512M	12	6~13.2	0.10	1.20	2500	0.714	25.23	2.2	0.087	26.40
HXD801512H	12	6~13.2	0.16	1.92	3000	0.856	30.23	2.68	0.106	30.40
HXD801512D	12	6~13.2	0.22	2.64	3500	0.998	35.23	3.22	0.127	35.20
HXD801524L	24	18~26.4	0.05	1.20	2000	0.600	21.20	1.88	0.074	22.70
HXD801524M	24	18~26.4	0.07	1.68	3500	0.714	25.23	2.2	0.087	26.40
HXD801524H	24	18~26.4	0.10	2.40	3000	0.856	30.23	2.68	0.106	30.40
HXD801524D	24	18~26.4	0.15	3.60	3500	0.998	35.23	3.22	0.127	35.20
HXD801524D1	24	18~26.4	0.22	5.28	3500	1.119	39.51	3.85	0.152	40.20

联系人: 李先生 手机: 13600198950 13798416506

邮箱: szhuaxianda@163.com QQ: 360201056