


HXD6038 Series


Size	60×60×38mm (2.86" × 2.86" × 1.50")
Frame:	Plastic PBT (UL:94V-0)
Impeller:	Plastic PBT (UL:94V-0)
Life expectancy:	Sleeve Bearing 30000(Hrs) at 25°C Ball Bearing 50000(Hrs) at 25°C
Operating temperature:	Ball bearing: -30~75°C Sleeve bearing: -10~70°C
Dielectric strength:	5 mA max at 500VAC 60Hz 1 minute
Safety:	UL/ CUL/ CE/ TUV
Net weight:	22g



Outline Dimensions (Units:mm)

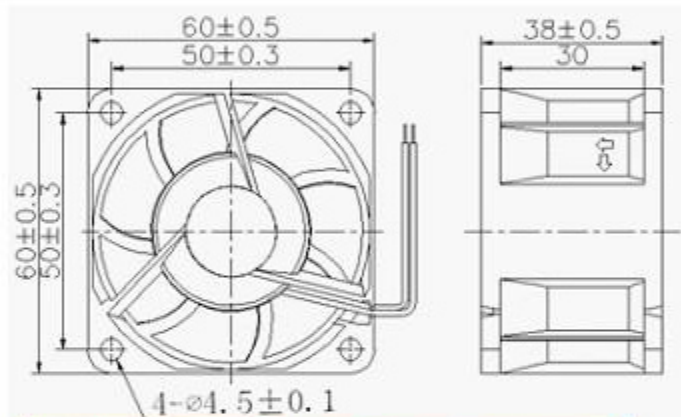

Performance Curve

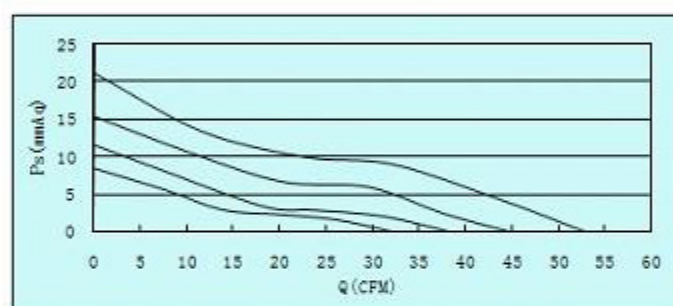

Specifications

Voltage Available

05	12	24	48
----	----	----	----

Bearing Type Available

B	S	BS
---	---	----

Function Available

FG	RD	AS	PWM	OVP
----	----	----	-----	-----

Voltage Available

Model	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (A)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow (CFM)	Max Air pressure (mmH2O)	Noise (dB-A)
HXD603805L	5	3.5~5.5		0				
HXD603805M	5	3.5~5.5						
HXD60385H	5	3.5~5.5						
HXD603805D	5	3.5~5.5						
HXD603805D1	5	3.5~5.5						
HXD6038012L	12	6~13.2						
HXD603812M	12	6~13.2						
HXD6038012H	12	6~13.2						
HXD6038012D	12	6~13.2						
HXD6038012D1	12	6~13.2						

联系人: 李先生 手机: 13600198950 13798416506

邮箱: szhuaxianda@163.com

QQ: 360201056