


HXD4020 Series


Size:	40×40×20mm (1.57" × 1.57" × 0.79")
Frame:	Plastic PBT (UL:94V-0)
Impeller:	Plastic PBT (UL:94V-0)
Life expectancy:	Sleeve Bearing 30000(Hrs) at 25°C Ball Bearing 50000(Hrs) at 25°C
Operating temperature:	Ball bearing -30~75°C Sleeve bearing -10~70°C
Dielectric strength:	5 mA max at 500VAC 60Hz 1minute
Safety:	UL/CUL/CE/TUV
Net weight:	APPROX.29g



Outline Dimensions (Units:mm)

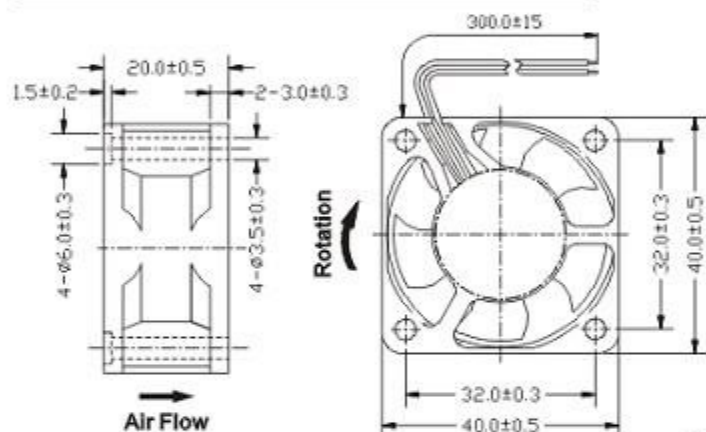

Performance Curve

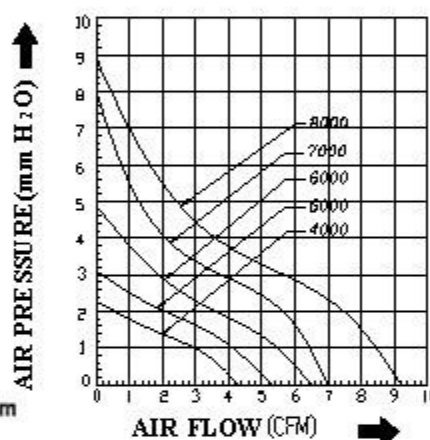

Specifications

Voltage Available

05	12	24	48
----	----	----	----

Bearing Type Available

B	S	BS
---	---	----

Function Available

FG	RD	AS	PWM	OVP
----	----	----	-----	-----

Model	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (A)	Rated Input Power (W)	Rated Speed (RPM)	Maximum Air Flow (m ³ /min)	CFM	Max Air pressure (mmH ₂ O)	IN H ₂ O	Noise (dB-A)
HXD402005M	5	3.5~5.5	0.12	0.60	4000	0.122	4.30	2.35	0.093	19.60
HXD402005H	5	3.5~5.5	0.17	0.85	5000	0.151	5.35	3.15	0.12	21.50
HXD402005D	5	3.5~5.5	0.21	1.05	6000	0.186	6.58	4.92	0.194	25.50
HXD402012L	12	6~13.2	0.07	0.84	4000	0.122	4.30	2.35	0.09	19.60
HXD402012M	12	6~13.2	0.10	1.20	5000	0.151	5.35	3.15	0.124	21.50
HXD402012H	12	6~13.2	0.14	1.68	6000	0.186	6.58	4.92	0.19	25.50
HXD402012D	12	6~13.2	0.18	2.16	7000	0.225	7.95	7.01	0.276	29.60
HXD402012D1	12	6~13.2	0.22	2.64	8000	0.251	8.87	9.21	0.36	32.00
HXD402024L	24	18~26.4	0.06	1.44	4000	0.122	4.30	2.35	0.093	19.60
HXD402024M	24	18~26.4	0.07	1.68	5000	0.151	5.35	3.15	0.12	21.50
HXD402024H	24	18~26.4	0.08	1.92	6000	0.186	6.58	4.92	0.194	25.50
HXD402024D	24	18~26.4	0.09	2.16	7000	0.225	7.95	7.01	0.28	29.60
HXD402024D1	24	18~26.4	0.10	2.40	8000	0.251	8.87	9.21	0.363	32.00

联系人: 李先生 手机: 13600198950 13798416506

邮箱: szhuaxianda@163.com

QQ: 360201056